



Stand: 2020/11/24

Spring loaded gate roller TRE NBF 03/125/40K

Item No.: 401032

Housing: Light fixed fork made of steel with fixing-plate, welded construction, with built-in spring, travel max. 60 mm, our Series NBF

Wheel: Tyre: made of polyurethane - Redroft®, non-marking, 75 shore a, red; Rim: made of aluminium, ball bearing

Specifications

Wheel-diameter (D):	125
Wheel-diameter x width (t):	125x40
Structure:	fixed caster
Wheel bearings:	Plain bearing
Material tires:	polyurethane Redsoft®
Color tires:	red
Rim material:	aluminum
Color rim:	silver
Surface of the housing:	zincd
Material of housing:	steel, welded
Fixing:	fixing plate
tread (T):	40
non marking:	Yes
Tread hardness (Shore A):	75
fixing plates dimension (A x B):	183x130
Fixing hole (a x b):	154x102
Bolt hole Ø:	8
Total high (H):	410
Load capacity (Kg):	350
Spring travel:	60
Temperature of °C:	-30
Temperature up to °C:	80
EAN-Code:	4250777726092
Delivery time in days:	4
Unit weight (Kg):	2.505

Review

Rolling resistance:	
Wear and tear:	
Soil conserving:	
Driving noise:	

Series

Wheel-Series:	TRE
Housing:	NBF

Variants




[wheel](#)
[TRE 125/40/4K](#)



[fixed caster](#)
[Spring loaded gate roller EGB NBF 02/100/30R](#)

[fixed caster](#)
[Spring loaded gate roller KRS NBF 03/125/50G](#)

Caster

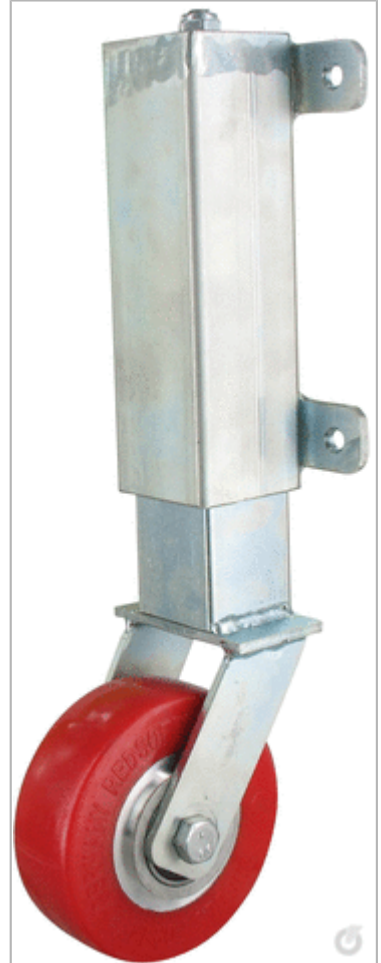

Wheel

